

Digta 7

DICTATION REINVENTED



*This is the future speaking:
SIMPLICITY, EFFICIENCY,
SECURITY, QUALITY & MOBILITY*



The sturdy device comes with a one-of-a-kind slide switch offering Touch Pin® function. This way you can dictate with your eyes closed, you'll automatically feel the stop position.

Plus, the slide switch can be configured to meet your dictation style - making it especially practical for those new to Grundig dictation machines. The display is extra large and shows all information very clear - even in the glare of direct sunlight. Optimum audio quality in the DSSPro recording format (ideally suitable for speech recognition as well), effective workflow functions and highest security standards are a matter of course.


The scope of delivery includes the high-capacity PC software DigtaSoft for dictation transfer, configuration and PC recordings.

- Slide switch offering Touch Pin®, configuration of the function sequence
- 2 GB on-board memory for almost 300 hours of recording time, extendable with external DigtaCard.
- Best sound quality thanks to DSSPro, ideally suitable for speech recognition
- XXL display: high contrast, illuminated, easy-to-read screen design, clear graphic dictation bar
- Li-Polymer rechargeable battery
- Easy-Mode
- Effective DSS workflow by means of key word allocation, pluggable barcode reader
- PIN/PUK protection, UUID, encryption of dictations
- Including DigtaSoft One/DigtaSoft
- Accessories: Digta Station 447

www.grundig-gbs.com · www.digta7.com · info@grundig-gbs.com

Your Grundig Business Systems Partner:

Krause Practice Management, LLC
Waterford, WI
262-806-7218
www.krausepm.com

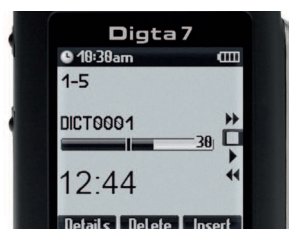

DISPLAY


Display of dictation length and dictation position in the progress bar featuring automatic scaling, individually disableable displays, e.g. dictation name/ ID, recording level, recorder symbols

turn voice into  action

GRUNDIG
Business Systems

TECHNICAL DATA

Digta 7 / Digta 7 PUSH / Digta 7 PREMIUM

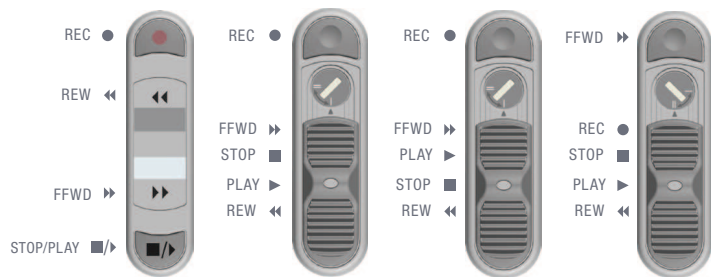

DISPLAY	Transflective LCD display, 16 gray scale values, white background illumination Screen diagonal 46.5 mm / 1.83 inch Writeable space 32.9 x 32.9 mm / 1.3 x 1.3 inch Resolution 160 x 160 pixel
MEMORY MEDIUM	2 GB of internal memory for 300 hs of recording time MMC/SD/SDHC slot for Digta Card (up to 32 GB)
FILE FORMAT	DSS/DSSPro, optionally WAV, optionally MP3
MEMORY CAPACITY DSS Standard Play (SP): DSS Pro Quality Play (QP): WAV mono (according to sampling rate)	10 min of recordings (data rate) approx. 1 MB (13.5 kbit/s) approx. 2 MB (26 kbit/s) 9.6 MB (8 kHz sampling rate, 15 kbit/s) up to 57.6 MB (48 kHz sampling rate, 768 kbit/s)
FREQUENCY RANGE DSS Standard Play (SP): DSS Pro Quality Play (QP): WAV mono (according to sampling rate):	200 - 5 500 Hz 200 - 7500 Hz 200 - 3 500 Hz bis 200 - 20 000 Hz
PLAY-BACK SPEED	From 50 % to 150 % adjustable in 20 levels
MICROPHONE SOCKET	3.5 mm jack, mono
EARPHONE SOCKET	3,5 mm jack, mono Impedance of 32 Ohm max. output voltage 160 mV
PC INTERFACE	USB 1.1, USB 2.0 high speed USB removable disc, USB audio and USB HID Direct dictation to PC via key control and slide switch control of DigtaSoft or speech recognition systems), USB power supply and battery recharging
BATTERIES	2 x 1,5 V batteries, type Micro/AAA
RECHARGEABLE BATTERY Charging time Operating time	Rechargeable battery pack 962 about 4 h up to 25 h
DIMENSIONS Dictation device (LxWxD, without protruding user controls)	approx. 130 x 52 x 22 mm / 5.12 x 2.05 x 0.87 inch
WEIGHTS (Dictation device including rechargeable battery pack 962)	approx. 122 g / 4.303 oz
INTERNAL SPEAKER Diameter Max. power output	28 mm / 1.1 inch 200mW
STORAGE TEMPERATURE	-20° C up to +70° C
OPERATING TEMPERATURE	-15° C up to +35° C
CASING COLOR	black
SYSTEM REQUIREMENTS FOR DIGTASOFT	WIN XP SP2/WIN Vista, WIN 7, MAPI compatible email system, (e. g. MS Outlook)

The performance features described by Grundig only apply to genuine Grundig accessories. The use of non-Grundig Business Systems accessories or those which are not recommended and approved by Grundig Business Systems automatically void any warranty claims towards Grundig Business Systems.

Grundig Business Systems GmbH Emmericher Straße 17, D-90411 Nuremberg
GBS North America L.L.C., 2135 City Gate Ln., Suite 300, Naperville, IL 60563
E-Mail: info@grundig-gbs.com, Internet: www.grundig-gbs.com. Printed in Germany.
Alterations and availability are subject to change without prior notice.
Order-number: HNE 6235 01/2011

Digta 7 SERIES

	7	7 PUSH	7 PREMIUM	7 PREMIUM/BT
HOUSING composite softtouch composite (chromium plated decoration ring)	•	•	--	--
OPERATING ELEMENTS Push button pad Slide switch all function keys with fixed assignment 4 configurable function keys (2 lateral keys, New button, record button)	--	•	--	--
IN-BUILT MICROPHONES 1 microphone 2 microphones (stereo)	•	•	--	--
RECORDING FORMATS DSS, DSS Pro WAV (mono, stereo) MP3 (mono, stereo)*	•	•	•	•
WORKFLOW Priority Deadline Workflow lists: Worktypes Secretaries Authors Groups Categories	•	•	•	•
Text editor for dictation ID	•	•	•	•
Index function	•	•	•	•
Info function	--	--	•	•
Data lists	--	--	•	•
Postponed dictation / EOL	--	--	•	•
Lock the dictation	--	--	•	•
SAFETY PIN enquiry when the device is switched on (can be turned off), ensuring access protection of the internal memory, dictation encryption 128/256 bit with password protection, confusion proof UUID of each dictation	•	•	•	•
SPECIAL FUNCTIONS* Follow-up dictation (e.g. conference recording is done by several overlapping recordings), reference tone for not sent dictations, quick help function	•	•	•	•
PROFILE Easy Mode, Menu Mode 10 different profiles configurable	•	•	•	•
ACCELERATION SENSOR (wake-up, illumination on)	--	--	•	•
SPEECH RECOGNITION (Nuance VoCon Engine for speech recordings to the "Number/Reference" data field)	--	--	•	•
BLUETOOTH* Dictation transfer to Smartphone Presenter function	--	--	--	•
SCOPE OF DELIVERY USB cable Digta pouch 914 Digta Flap Case 918 Wrist strap 2 x Alkaline AAA batteries Rechargeable battery pack 962 DigtaSoft One, DigtaSoft DigtaSoft Pro Slider Key(Slide switch setting) Carry clip Power Supply Unit 477	•	•	•	•

* Update from 3/2011